

ArcticChill 88

Exceptional Capacity Direct Chill

- Direct chill cold water cooler
- Single dispensing button for chilled water
- Can be fitted with overflow kits & mains drainage
- Fits our standard cowling and wall bracket
- WRAS approved
- FloodGuard inlet solenoid protects the cooler against large scale flooding
- Impressive 23cm dispensing height

23cm Dispensing
Height To Fill
Bottles

Delivers 30 - 40 Litres
Per Hour Of Chilled
Water Below 12 °C



ArcticChill 88 KLARAN
The Klaran UVC LED Shield
Is Situated Between The
Direct Chill Tank & In Front
Of The Dispensing Tap

ArcticChill 88 KLARAN

Exceptional Capacity Plus Self Sanitising With KLARAN

- The Klaran UVC LED Shield is designed to destroy bacteria and viruses to protect your health
- The KLARAN UVC LED Shield represents a major technological break-through by providing 24/7 protection against bacterial contamination
- The revolutionary KLARAN UVC LED Shield destroys 99%+ of Cryptosporidium, Giardia, E-Coli, Pseudomonas, Legionella and other bacteria
- The Klaran UVC LED Shield is situated between the Direct Chill Tank and in front of the dispensing tap, to provide point of dispense protection from bacteria and viruses

AA FIRST
WATER COOLERS
& BOILERS



refreshingly different

ArcticChill 88 & ArcticChill 88 KLARAN

Exceptional Capacity Plus Self Sanitising With KLARAN

Accessories For The ArcticChill 88

A Pumped Main Drainage System Pumps The Waste Water From The Drip Tray Over A Distance Of 100m & A Rise Of 5m. (Factory Installed).



Filter Housing With Carbon Block Candle & Nanofilter.



Cowling To Fix The Cooler Securely To The Wall (Supplied Separately).



Installation Rail With Filter. Includes Compression Fitting, 1-Micron Green Filter, Water Block, Copper Pressure Reducing Valve & Non-Return Valve.



10 Litre Overflow System With Alarm To Signal When Full. (Factory Fitted).




FloodGuard - Inlet Solenoid Only Opens To Allow Water Into The Cooler, When Water Is Dispensed. By Remaining Closed All Other Times It Protects The Cooler Against Leaks.



3 Litre Overflow Kit Connects The Drip Tray To A 3 Litre Alarmed Overflow Container. The Container Has A Tap To Empty Without Removing It.




Mains Drainage - Connect The Drip Tray To Mains Drainage. Can Be Supplied With A Pump, To Pump The Water Over 50m & A Rise Of 5m.



KLARAN UVC LED SHIELD

For Direct Chill/ Ice Bank Coolers

- The KLARAN UVC LED Shield represents a major technological break-through by providing 24/7 protection against bacterial contamination
- The revolutionary KLARAN UVC LED Shield destroys 99%+ of Cryptosporidium, Giardia, E-Coli, Pseudomonas, Legionella and other bacteria
- Simple to install and maintenance free, which is in stark contrast to conventional UV light systems, the KLARAN UVC LED Shield adds real value to your water cooler offer
- KLARAN UVC LED Shield can be supplied factory installed into an AA Water Cooler, or can be provided as a unit for self-installation

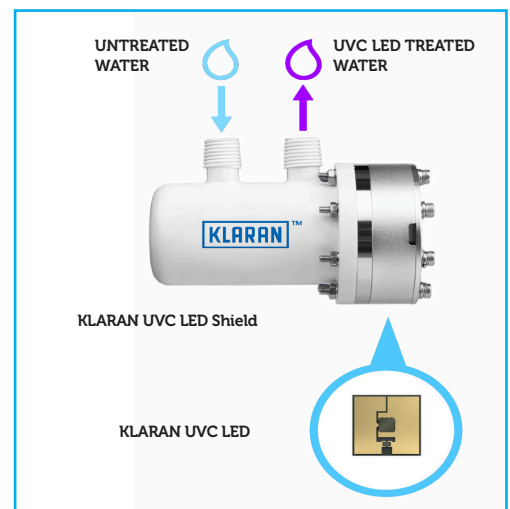

| Description | Dimensions H X W X D (MM) | Weight (Kg) |
|--------------------|---------------------------|-------------|
| POU Floor Standing | 1135 x 340 x 340 | 25 |
| POU Table Top | 460 x 340 x 340 | 16 |

AAFIRST
WATER COOLERS
& BOILERS

www.aafirst.co.uk