AA First Product Catalogue 2022-2023





Quality – Reliability – Integrity

Contents

AA First Water Coolers	3
AA First Fountains & Under-sink Chillers	4
AA First Water Boilers	5
AA First Accessories	6-7
Various Tap Options	8
COSMETAL Coolers From AA First	9-11

Quality – Reliability – Integrity

AA First are a division of Circon Ltd – a privately-owned family business.

Our aim is to provide you with Quality products, a Reliable service, & with Integrity in everything we are doing.

AA First was established in 1993 & since then has become one of Europe's largest Distributor, having sold more than 225,000 Water Coolers. We keep a large stock of between 3,000 & 5,000 Water Coolers to allow us to despatch your order on the same or next day.

Halls

CEO

lithe Hans Krohn Peter Benson

MD AAFirst

	AFIRST ter Coolers	ArcticRevolution 70	ArcticStar 55	ArcticChill 88	ArcticChill 98		AQUALITY WG AQUALITY IB AQUALITY IB WG O O O O O O O O O O O O O O O O O O O	Jazz 1000	AquaPoint 60 AquaPoint 60B
Тар	os: Manual/Solenoid/Contactless	S/CL	М	S/CL	S/CL	М	S	М	М
	POU/Bottled	POU	P/B	POU	POU	P/B	P/B	P/B	P/B
	Floor Standing/Table Top	TT	FL/TT	FL/TT	FL	FL/TT	FL	FL	FL
	Chilled & Ambient	✓	√	CHILLED ONLY	√	✓	√	✓	√
	Chilled & Hot	-	√	-	-	√	-	√	-
	CO ² Carbonated (Sparkling)	-	-	-	-	-	AQUALITY IB WG/ AQUALITY WG	-	-
	600gr CO ² Cylinder	-	-	-	-	-	90 Litres	-	-
	Direct Chill/Tank Fed/ICE Bank	DC	TF	DC	DC	TF	IB	TF	TF
	Dispensing Height	21cm ✓	16cm ✓	23cm	23cm ✓	14cm	25.6cm	14cm	14cm
(In-fluent Water	Hygiene-guard	v	•	•	v	-	22 Ltr/H (Bottled)	-	-
Temp 16°C)	Chilled Below 12°C Ltr/H	10 Ltr/H	20 Ltr/H 9 Ltr/H	30 - 40 Ltr/H	30 - 40 Ltr/H	20 Ltr/H 5 Ltr/H	28 Ltr/H(POU)	20 Ltr/H	20 Ltr/H
	Hot Water Hourly Capacity Ltr/H	-	Above 90°C	-	-	85°C +	-	5 Ltr/H 85℃ +	-
	Boosted Hot Instant Draw Off	-	1.5 ltrs between 90°C & 95°C	-	-	-	-	-	-
	Dimensions: POU FL	-	1135H 340W 340D	1135H 340W 340D	1135H 340W 340D	1135H 340W 340D	1118H 345W 337D	1015H 340W 335D	1032H 326W 353D
	Dimensions: POU TT	370H 240W 488D	460H 340W 340D	460H 340W 340D	-	460H 340W 340D	-	_	-
	Dimensions: Bottled FL	-	1150H 340W 340D	-	-	1150H 340W 340D	1118H 345W 337D	1020h 340W 335D	1032H 326W 353D
	Dimensions: Bottled TT	_	465H 340W 340D	-	-	465H 340W 340D	-	-	-
In S	Cup Dispenser (Can Be Replaced Some Models By Blanking Panel)	-	✓	-	-	~	1	-	-
ECO S	Sensor: Approx 25% Power-saving	-	\checkmark	-	-	-	-	-	-
	Flood-guard Flood Protection	✓	-	✓	√	-	-	-	-
	proved (Certificate No. 1702077)	-	-	\checkmark	-	\checkmark	√	-	-
	ditional Upgrades & Accessories:								
	24/7 Self Sanitising For Bottled & Open Tank POU Coolers	-	ArcticStar 55 SIP	-	-	3300X SIP	-	-	-
	Contactless Infra Red Dispensing For POU Coolers	ArcticRevolution 70CL/70BCL 《 🌒	-	ArcticChill 88CL	ArcticChill 98CL	_	-	-	-
KLARAN UV	/C LED Water Purification System For Direct Chill POU Coolers	ArcticRevolution 70/70B KLARAN	-	ArcticChill 88 KLARAN	ArcticChill 98 KLARAN	_	-	-	-
Cor U	ntactless Dispensing with KLARAN IVC LED Water Purification System For Direct Chill POU Coolers	ArcticRevolution 70CL/70BCL KLARAN 《 🍿	-	ArcticChill 88CL KLARAN 《 🍿 🕅	ArcticChill 98CL KLARAN	-	-	-	-

Quality – Reliability – Integrity

	Fountain WFT6	Hands-Free Fountain WFP9T	Under-sink Chiller UC800MC With Manual Swan Neck Tap	Under-sink Chiller UC800MCL With Contactless Swan Neck Tap	FONT10 Wall-Mounted Fountain With Bubbler	Drinking Fountain FONT10BCL With Contactless Bubbler	FONT10CL Wall-Mounted Fountain With Contactless Swan Neck Tap	Drinking Fountain With Bottle Filler FONT30	Drinking Fountair With Contactless Bottle Filler & Contactless Bubbler
Water Fountains & Under-Sink Chillers	Minimu Minimu Minimu Minimu				and a second				FONT30CL
		Contactless		Contactless		Contactless	Contactless		Contactless
Mains Connected & Mains Drainage	✓	✓	✓	✓	✓	✓	✓	✓	✓
Indoor Or Covered Outdoor Installation	Indoor Only	Indoor Only	Indoor Only	Indoor Only	Suitable For Covered Outdoor	Suitable For Covered Outdoor	Suitable For Covered Outdoor	Suitable For Covered Outdoor	Suitable For Covered Outdoor
Manual Tap/Hands Free/Contactless Tap	MAN	HF	MAN	CL	MAN	CL	CL	MAN	MAN & CL
/Floor Standing/Wall Mounted Under-sink	FS	FS	US	US	WM	WM	WM	WM	WM
Dispensing Height	21cm	21cm	20cm	23cm	N/A	N/A	23cm	35cm	35cm
Drinking Bubbler	√	-	-	-	✓	~	-	√	\checkmark
Ambient Water	-	-	-	-	Without UC800M Chiller	Without UC800M Chiller	Without UC800M Chiller	Without UC800M Chiller	Without UC800M Chiller
Chilled Water	26 ltr/h	26 ltr/h	11.5 ltr/h	11.5 ltr/h	Add UC800M for Chilled Water	Add UC800M for Chilled Water	Add UC800M for Chilled Water	Add UC800M for Chilled Water	Add UC800M for Chilled Water
Dimensions (mm)	1015H 305W 305D	1015H 305W 305D (Pedal + 65D)	300H 410W 300D	300H 410W 300D (TAP + 300H)	220H 310W 345D (CHILLER 300H 410W 300D)	220H 310W 345D (CHILLER 300H 410W 300D)	220H 310W 345D (TAP + 300H) (CHILLER 300H 410W 300D)	750H 330W 370D (CHILLER 300H 410W 300D)	750H 330W 370D (CHILLER 300H 410W 300D)
Description	Durable fountain with push button swan neck & bubbler. 26ltr/h capacity below 10°C from in-fluent water temperature of 20°C.	swan neck which is	The UC800MC under-sink chiller has an attractive chrome manual swan neck tap.	UC800MCL Under-sink chiller with a contactless swan neck tap. The swan neck tap has an infra-red sensor which activates the dispensing through hand movement.	The FONT10 has a Bubbler to dispense water. Robustly built & easy to install, the FONT meets the growing need of dispensed drinking stations indoors or in covered outdoor areas.	Bubbler contact contamination. Robustly built and	mounted fountain combines our FONT10 with a contactless swan neck tap. The infra-red sensor of the tap activates dispensing	The FONT30 Wall mounted drinking fountain with bubbler & bottle filler. Robust build and easy to install it meets the growing need of dispensed drinking stations indoors and in covered open spaces.	The FONT30CL wal mounted drinking fountain has a contactless bottle filler and a contactle Bubbler. Both have infra-red sensors which activates dispensing through hand movement Robust build and ea to install indoors or covered outdoor area
Accessories									
Plumbing & Filter Kits	✓	~	✓	V	✓	✓	~	*	√
Cowling To Secure WFT6 & WFP9T To The Wall		√	-	-	-	-	-	-	-

4 AA First 2022

Quality – Reliability – Integrity

	EZYTAP75/ EZYTAP75T	EZYTAP7800/ EZYTAP7800T	1200L	Power Smart 3	1000C	1500	WA5	1000TF
AAFIRST Water Boilers								
Tap With Under-sink Boiler Tap With Under-sink Boiler & Chiller Table Top Boiler/Wall-mounted Boiler	Tap With Under-sink Boiler	Tap With Under-sink Boiler & Chiller	Table Top Boiler	Table Top Boiler	Table Top Boiler	Table Top Boiler	Wall-mounted Boiler	Table Top Boiler
Instant Draw Off	3.5 Ltr Hot + Ambient	3.5 Ltr Hot 2 Ltr Chilled	8 Ltr	6Ltr	5 Ltr	10 Ltr	5 Ltr	10 Ltr
Capacity Ltr/H	14 Ltr/Hr + Ambient	14 Ltr/H + 11.5 Ltr/H Chilled	17 Ltr/H	17 Ltr/H	31 Ltr/H	31 Ltr/H	31 Ltr/Hr	31 Ltr/Hr
Hot Only Hot & Ambient Hot & Chilled	Hot & Ambient	Hot & Chilled	Hot Only	Hot Only	Hot Only	Hot Only	Hot Only	Hot Only
Dispensing Height	18.5cm (EZYTAP75) 24cm (EZYTAP75T)	18.5cm (EZYTAP7800) 24cm (EZYTAP7800T)	16.5cm	16.5cm	16.5cm	15cm	-	13.5cm
Dispensing Taps	Solenoid Tap	Solenoid Tap	Manual Tap	Manual Tap	Manual Tap	Manual Tap	Manual Tap	Contactless
Dimensions (mm)	329H 220W 352D	Boiler 329H 220W 352D Chiller 300H 410W 300D	560H 260W 260D	436H 215W 345D	440H X 218W X 465D	610H X 243W X 510D	438H 290W 207D	545H 240W 522D
ECO Sensor	-	-	-	~	-	-	-	-
On demand / timed dispense with top up dispense feature	-	-	-	-	-	-	-	~
Safety light in cup recess avoids accidental dispense	-	-	-	-	_	-	-	✓
Description	The electronic EZYTAP75/75T provides hot and ambient water and is connected to an under-sink boiler. The EZYTAP75T has an extra tall dispensing height of 24cm for bottle filling.	The electronic EZYTAP7800/7800T provides hot and chilled water and is connected to an under-sink boiler and the UC800M under-sink chiller. The EZYTAP7800T has an extra tall dispensing height of 24cm for bottle filling.	Economy boiler - sturdy and reliable.	Low height with 24/7 timer to turn the boiler off. Can save you up to £40 p.a. in electricity and 175kg in carbon production.	Counter top boiler for tight spaces. WRAS Approved.	Top of the range high capacity table top boiler. WRAS Approved.	Wall mounted boiler. WRAS Approved.	High capacity contactless dispensing boiler with on demand or timed dispense feature. WRAS Approved.




Accessories for AA Water Coolers, Fountains & Boilers

Spares & consumables for AA Water Coolers Fountains & Boilers. You can view our website www.aafirst.co.uk to access the huge number of spares & consumables.





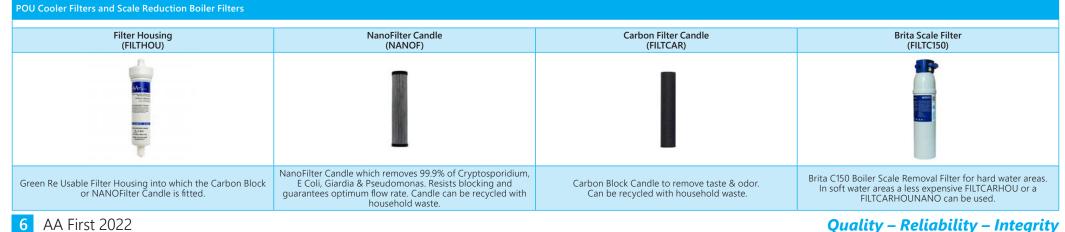

AA First 2022 6

SIPneo3 Automatic Sanitising	KLARAN UVC LED Shield - Water Purification System	GLASSFILLER CL Contactless Tap	FONT101CL - Contactless Bubbler
SIPneo3	KLARAN	Contactless Tap (GLASSFILLERCL)	Contactless Bubbler (FONT101CL)
SIPreo,	Great		
24/7 Automatic Sanitising Water Coolers. SIP Sleep Mode can save up to 46% in electricity. Factory Fitted or Self Installed options.	The KLARAN UVC LED Shield protects Direct Chill Water Coolers from Bacteria, Viruses & other Pathogens providing point of dispense protection. Factory Fitted or Self Installed options.	Contactless Swan Neck Glass Filler which is activated by an Infra Red Sensor to avoid Contact Contamination.	Contactless Fountain Bubbler which is activated by an Infra Red Sensor.

Drip Tray Overflow Options





Quality – Reliability – Integrity

AA First 2022



Tap With Under-Sink Boiler & Chiller (Complete)

		Code	Description	Category	Hourly (ltrs)	Instant Draw Off (ltrs)	Chiller Ice Bank (POU)	Boiler	Dispensing Height	٥				Requires Gas & Regulator	WRAS	Dimensions (CM) WxDxH
	YTAP75/ YTAP75T	EZYTAP75/ EZYTAP75T	The electronic EZYTAP75/75T provides hot and ambient water and is connected to an under-sink boiler. The EZYTAP75T has an extra tall dispensing height of 24cm for bottle filling. EZTRAY2 available.	Тар	14 Ltr/Hr + Ambient	3.5 Ltr Hot + Ambient	UC800 Undersink	Undersink	18.5cm (75) 24cm (75T)	,	-	-	~	-	-	22.0 x 35.2 x32.9 (Boiler)
	YTAP7800/ YTAP7800T	EZYTAP7800/ EZYTAP7800T	The electronic EZYTAP7800/7800T provides hot and chilled water and is connected to an under-sink boiler and the UC800M under-sink chiller. The EZYTAP7800T has an extra tall dispensing height of 24cm for bottle filling. EZTRAY2 available.	Тар	14 Ltr/H + 11.5 Ltr/H Chilled	3.5 Ltr Hot 2 Ltr Chilled	UC800 Undersink	Undersink	18.5cm (7800) 24cm (7800T)	-	>	-	~	-	-	22.0 x 35.2 x32.9 (Boiler) 30.0 x 41.0 x 30.0 (UC800)
PRO	O-STREAM TAP55	CEPROIIN55HCWG	Three-WAY Electronic Tap with H2OMY (H2OMY IN 15 IB AC WG) Undersink Ice Bank Chiller and Boiler. Includes VR-G7 Drip Tray.	Тар	55ltr/h Hot & 15ltr/h Cold or CO ²	5ltr/h Hot and 3ltr/h Cold or CO ²	H2OMY IN 15 IB AC WG Undersink	Undersink	23cm	•	*	`	~	REGCO2	~	13.1 x 21.2 x 25.5 (Tap) 24.2 x 31.5 x 40.7 (Boiler) 26 x 30 x 40.7 (H2OMY) 12.2 x 12.8 x 8.6 (Drip Tray)

Taps: Mix & Match

Code Name		Description		Description		UC800	NIAG	ARA IN	H20M		J CLA	ISS IN	Drip Tray
				Chilled Only	Ambient & Chilled	Ambient & Chilled & CO ²	Ambient & Chilled	Ambient & Chilled & CO ²	Ambient & Chilled	Ambient & Chilled & CO ²			
UC8002	Manual Swan Neck Tap	Manual Two Way Tap For Chilled Water	20cm	~	-	-	-	-	-	-	VR-I		
GLASSFILLERCL	Contactless Swan Neck Tap	Contactless Tap With Infra-red Sensor For Chilled Water	23cm	~	-	-	-	-	-	-	VR-I		
CEDRTWGEC	DRINK TOWER V19 EC AC WG	Electronically Controlled Tap For Ambient & Chilled, Or Chilled & CO ² Carbonated Water	33.8cm	-	~	~	~	~	v	ý	VR-I		
CETAPCOB	Cobra 2	A 2 Way Chrome-Plated Manual Tap	29.5cm	-	~	~	v	~	~	¥	VR-I		
CETAPG400	G400 AC WG	Electronic Tap For Ambient, Chilled & CO ² Carbonation	29.5cm	-	-	~	-	~	-	v	VR-I		
CETAPG72	G72 WG	Manual Two Way Tap For Chilled & CO ² Water	30cm	-	-	~	-	~	-	~	VR-I		
CETRAYVR1	Driptray VR-I	Dimensions (CM) 40.5W x 22.5D x 2.8H	-	-	v	~	~	~	~	¥			

COSMETAL Coolers Now Available From AA First

The following COSMETAL pages highlight the most popular products which we carry in stock & can supply at short notice.

COSMETAL supply a vast range of products & product variations which we cannot show here. If you require other models not shown in our catalogue please contact us to discuss your requirements.



NIAGARA FS 120 (CEN120C8)

COSMETAL[®] From AA First

Water Coolers & Under-Sink Units



10 AA First 2022

Quality – Reliability – Integrity

From AA First





Tap With Under-Sink Boiler & Chiller

PRO-STREAM TAP55	Code	Description	Category	Hourly (ltrs)	Instant Draw Off (ltrs)	Chiller Ice Bank (POU)	Boiler	٥	٢	٨	Requires Gas & Regulator	WRAS	Dimensions (CM) WxDxH
	CEPROIIN55HCWG	Three-WAY Electronic Tap with H2OMY (H2OMY IN 15 IB AC WG) Undersink Ice Bank Chiller and Boiler. Includes VR-G7 Drip Tray		55ltr/h Hot & 15ltr/h Cold or CO ²	5ltr/h Hot and 3ltr/h Cold or CO ²	H2OMY IN 15 IB AC WG Undersink	Undersink	`	\$ `	v	REGCO2	~	13.1 x 21.2 x 25.5 (Tap) 24.2 x 31.5 x 40.7 (Boiler) 26 x 30 x 40.7 (H2OMY) 12.2 x 12.8 x 8.6 (Drip Tray)

Taps: Mix & Match

			NIAG	ARA IN	H201	MY IN	J CLA	SS IN	Duin Trees
Code	Code Name Description		Ambient & Chilled	Ambient & Chilled & CO ²	Ambient & Chilled	Ambient & Chilled & CO ²	Ambient & Chilled	Ambient & Chilled & CO ²	Drip Tray
CEDRTWGEC	DRINK TOWER V19 EC AC WG	Electronically Controlled Tap For Ambient & Chilled, Or Chilled & CO ² Carbonated Water	~	ý	Ý	~	~	~	VR-I
CETAPCOB	Cobra 2	A 2 Way Chrome-Plated Manual Tap	~	~	~	~	~	~	VR-I
CETAPG400	G400 AC WG	Electronic Tap For Ambient, Chilled & CO ² Carbonation	-	Ý	-	~	-	~	VR-I
CETAPG72	G72 WG	Manual Two Way Tap For Chilled & CO ² Water	-	Ý	-	~	-	~	VR-I
CETRAYVR1	Driptray VR-I	Dimensions (CM) 40.5W x 22.5D x 2.8H	~	Ý	Ý	~	~	~	
CETRAYVRIS	Driptray VR-IS	Dimensions (CM) 40.8W x 18.9D x 3.2H		Compatibl	e Drip Tray For Th	e Niagara TOP 120	IB AC WG C8 EC	(Inox Hook On Dri	p Tray)

Installation Rail, Filter & Accessories (To connect COSMETAL Water Coolers & Under-sink units to a mains water supply)

			Code	Description	WRAS Approved
	RAILKIT CEAQOVERFLOW	REGCO2	PFRAILKITCOS	Installation Rail for NIAGARA 120 Itr Coolers With High Capacity Replacement Filter Candle & Re-usable Filter Housing. Includes Compression Fittings, Non-Return Valve, Water Block & Pressure Reducing Valve	Ý
. 🕆 🏹			FILTBCM	High Capacity Replacement FIBREDYNE Filter Candle with 20,000 Litre Capacity for PFRAILKITCOS Installation Rail	~
ATT 3			PFRAILKIT	Installation Rail for the HI CLASS TOP 30, AQUALITY, H20MY IN 15, J CLASS IN 45 With Replacement Carbon Block Filter Candle & Re-usable Filter Housing. Includes Compression Fittings, Non Return Valve, Water Block & Pressure Reducing Valve.	~
melan			FILTCAR	Carbon Block Replacement Filter Candle for PFRAILKIT Installation Rail.	~
			CEAQOVERFLOW	3 Litre Drip Tray Overflow Kit Connecting To The Drip Tray. With Audible Alarm When Full. Pre-Installed Into AQUALITY Coolers	N/A
			REGCO2	Regulator for CO2 600Gm disposable cylinder M11x1 thread, for WG - With Gas Products where mentioned.	N/A



Quality – Reliability – Integrity

UK Head Office: Cedar House Grange Farm Long Lane Newbury RG14 2TF T: + 44 (0) 1635 202489 E: enquiries@aafirst.co.uk

European Correspondent:

T: + 33 (0) 674437445 T: + 33 (0) 640650708 E: Derek@aafirst.eu E: Lesley@aafirst.eu

www.aafirst.co.uk www.aafirst.eu www.aafirst.fr www.aafirst.de