

Product Catalogue

2024-2025



Quality – Reliability – Integrity



Quality – Reliability – Integrity



Contents AA First Water Coolers AA First Fountains & Undersink Chillers AA First Water Boilers AA First Accessories AA Ezytap Range 9-10 COSMETAL Taps From AA First COSMETAL Coolers From AA First 13-14 Our Journey

Quality – Reliability – Integrity

Dear Customer, we are pleased to present to you our 2024/25 Product Catalogue.

Explore our evolving range, where each product seamlessly combines form and function, providing a reliable and efficient solution for businesses looking to elevate the hydration experience for their customers.

We are cautiously confident that 2024/25 will continue to see growth by providing you with products and services which you require.

We thank you for your past business and wish you every success for the coming 12 months.

CEO

Hans Krohn Peter Benson MD AAFirst

Petsa

Water Coolers	ArcticRevolution 75B	ArcticStar 55	ArcticChill 108	ArcticChill 109	3300X	Aquapoint 60B	Aquality COSMETAL from	Hi Class Top 30
Classification Pou Bottled Point of Use	Pou	POU POU	РОИ	POU	Pou	Pou	POU	РОИ
Ambient Chilled CO ² Hot	&		♦					
Water Capacity Litres per hour	Ambient + 10 Ltrs/h Chilled	Ambient + 20 Ltrs/h Chilled or 20 Ltrs/h Chilled + 9 Ltrs/h Hot + Boosted temp to 90°c - 95°c	35 Ltrs/h Chilled	Ambient + 35 Ltrs/h Chilled	Ambient + 20 Ltrs/h Chilled or 20 Ltrs/h Chilled + 5 Ltrs/h Hot	Ambient + 20 Ltrs/h Chilled or 20 Ltrs/h Chilled + 5 Ltrs/h Hot	Ambient + 28 Ltrs/h Chilled + 28 Ltrs/h Sparkling or Ambient + 20-22 Ltrs/h Chilled	Ambient + 30 Ltrs/h Chilled or Ambient + 30 Ltrs/h Chilled + 30 Ltrs/h Sparkling
Dispensing Height	26.5cm	17cm	29cm	29cm	14cm	19cm	(Bottled) (POU) 25.5cm 27cm	30cm
Dimensions H x W x D (mm) Floor Standing (FS) Tabletop (TT)	(POU TT) 373 x 240 x 488	(Bottled FS) 1160 x 340 x 350 (Bottled TT) 480 x 340 x 350 (POU FS) 1140 x 340 x 350 (POU TT) 460 x 340 x 350	(POU FS) 1140 x 340 x 340 (POU TT) 445 x 340 x 340	(POU FS) 1140 x 340 x 340 (POU TT) 445 x 340 x 340	(Bottled FS) 1160 x 340 x 350 (POU FS) 1140 x 340 x 350 (POU TT) 460 x 340 x 350	(Bottled FS) 1032 x 326 x 353 (POU FS) 1032 x 326 x 353	(Bottled FS) 1119 x 337 x 345 (POU FS) 1118 x 337 x 345	(POU TT) 407 x 262 x 552
Description	Stylish direct chill table top cooler with a narrow footprint for small worktop spaces. Optional upgrades available for this cooler include KLARAN UVC and contactless dispensing.	Versatile cooler with the latest technology to meet every need. Eco sensor and hot water boosted temperature make this one of our most popular coolers. Upgrade this cooler by adding a SIP device.	Superior dispense height and quality assured cooler. This cost effective cooler can be upgraded with KLARAN UVC and contactless dispensing.	High capacity cooler with a superior dispense height for filling sports bottles. Optional upgrades for this cooler include KLARAN UVC and contactless dispensing.	Reliable cooler with hot water capacity. Built using the same tried and tested platform as the 108 & 109 coolers. Upgrade this cooler by adding a SIP device.	Contemporary design with a dependable build. This cost effective cooler has been updated to offer hot water dispensing.	Elegant and sturdy cooler built by Cosmetal. Features an integrated cup dispenser and a cutting edge ice bank system. Upgrade this cooler with a KLARAN UVC device.	Modern design table top cooler built by Cosmetal. Features a unique strip light down the centre of the front panel. Can be upgraded to include contactless dispensing.

	WFT6	UC800M	RIVER (Floor Standing)	RIVER (Wall Mounted)		
Fountains Undersink Chillers			SWRAS (COSMETAL) from the state of the stat	om AAFIRST		
Indoor or Outdoor Installation	Indoor Only	Indoor Only	Indoor Only	Indoor Only		
Floor Standing / Wall Mounted / Undersink	FS	US	FS	WM		
Dispensing Height	26cm (Swan Neck)	-	23cm (Swan Neck)	23cm (Swan Neck)		
Drinking Bubbler	~	-	✓	√		
Water Dispensing Chilled		⊗		♦		
Water Capacity Litres per hour	26 Ltrs/h	11.5 Ltrs/h	30 Ltrs/h	30 Ltrs/h		
Dimensions H x W x D (mm)	1015 x 305 x 305	260 x 290 x 400	960 x 330 x 330 Bubbler + 100(H)	505 x 432 x 360 Bubbler + 100(H)		
Our most popular floor standing water fountain. Features a classic push button swan neck tap with a polished stainless steel body that guarantees durability. Also comes with a traditional drinking bubbler.		Our versatile and reliable undersink chilling unit. The UC800M can be connected to range of our products including fountains and taps. This unit is quiet and discreet and features a high capacity stainless steel cold water tank.	WRAS approved floor standing fountain built by Cosmetal. The River is different to traditional ice bank fountains. The sealed ice bank has a low draining point which requires the service engineer to ensure the draining point is below the drip tray drain. Features a swan neck tap to accommodate for sports bottle filling.	WRAS approved wall mounted fountain built by Cosmetal. The River is different to traditional ice bank fountains. The sealed ice bank has a low draining point which requires the service engineer to ensure the draining point is below the drip tray drain. Features a swan neck tap to accommodate for sports bottle filling.		

A /	FIRST	•
Water	Boiler	5

Classification

Instant Draw Off

Water Capacity (Litres per hour)

Water Dispensing

Dispensing Height

Dimensions H x W x D (mm)


ECO Sensor

Description

	1200L	PowerSmart 3	1000C	1500	WA5
T ers	35 1	AA			
	Table Top Boiler	Table Top Boiler	Table Top Boiler	Table Top Boiler	Wall-mounted Boiler
	8 Ltr	6Ltr	5 Ltr	10 Ltr	5 Ltr
	17 Ltrs/h	17 Ltrs/h	31 Ltrs/h	31 Ltrs/h	31 Ltrs/h
	\Diamond	\Diamond	\bigcirc	\bigcirc	\bigcirc
	16.5cm	16.5cm	16.5cm	15cm	N/A
	560 x 260 x 260	436 x 215 x 345	440 x 218 x 465	610 x 243 x 510	438 x 290 x 207
	-	✓	-	-	-
	Economy boiler that delivers up to 96 cups per hour of boiling water. Sturdy and reliable, this stainless steel boiler also features an integrated drip tray and LED display.	Smart technology boiler that features a built in eco sensor. Delivers up to 96 cups per hour of boiling water and comes with an integrated drip tray. The PS3 has a small footprint making it an ideal economy solution for tight work spaces.	High output boiler that can deliver up to 186 cups of boiling water per hour. Compatible with a touch free adaptor for hygienic operation. Small footprint to fit under overhead cupboards.	Our top of the range boiler features a superior instant draw off and self diagnostic system. Compatible with a touch free adaptor to eliminate the risk of touch contamination. Delivers up to 186 cups of boiling water per hour.	Wall mounted boiler takes up no countertop space and delivers up to 186 cups of boiling water per hour. Variable dispense height dependant on where it is installed. Compatible with a touch free adaptor and features a sleek stainless steel body.

Water Cooler & Water Boiler Filters

Spares & consumables for AA Water Coolers Fountains & Boilers. You can view our website <u>www.aafirst.co.uk</u> to access the huge number of spares & consumables.

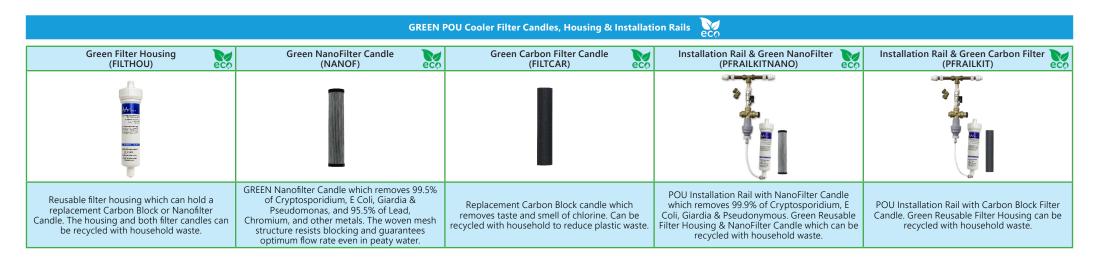



Drip Tray Overflow Systems & Accessories

Drip Tray Overflow Kits 108 & 109 10 litre Overflow Container **Pumped Waste System** 3 litre Overflow Container 10 litre Overflow Container 3 litre Overflow Container Waste System (WASTEKIT114) (PUMP2L) (WB4465) (OVERFLOW10) (OVERFLOW10NEW) (CEAOOVERFLOW) 10 litre overflow container that is only 3 Litre overflow container to fit a floor 3 litre overflow container connecting to 10 litre overflow container with compatible with the floor standing standing Aquality cooler. The tank has Pumps water from the drip tray to mains the drip tray. Features an alarm and a Connects the drip tray to mains alarm when full. Factory fitted or for ArcticChill 108 & 109 coolers. Features an alarm which sounds when full and drainage over a distance of 100m & a tap to empty in situ. Factory fitted or for drainage. Factory fitted only. self-installation. an alarm, drainage tap, and float switch has a tap to empty the tank in situ. rise of 5m. Factory fitted only. self-installation. Factory fitted or for self-installation. Factory fitted only.



Leading the industry with cutting edge technology





Expanded Ezytap Range

now features 9 model variants that provide up to 11.5ltr/h of chilled water and up to 28ltr/h of hot water

	EZYTAP 75/ EZYTAP 75T	EZYTAP 7800/ EZYTAP 7800T	EZYTAP 85/ EZYTAP 85T	EZYTAP 8800/ EZYTAP 8800T	EZYTAP AC800		
AAFIRST							
EZYTAP Range	A Control of the Cont		-2-2				
Water Dispensing Ambient Chilled Hot		♦ 1		♦ 1			
Hourly Output	14 Ltr/h Hot + Ambient	14 Ltr/h Hot + 11.5 Ltr/h Chilled	28 Ltr/h Hot + Ambient	28 Ltr/h Hot + 11.5 Ltr/h Chilled	11.5 Ltr/h Chilled + Ambient		
Instant Draw Off	3.5 Ltr Hot + Ambient	3.5 Ltr Hot 2 Ltr Chilled	7 Ltr Hot + Ambient	7 Ltr Hot 2 Ltr Chilled	2 Ltr Chilled + Ambient		
Undersink Boiler	EZYTAP 4Ltr Boiler	EZYTAP 4Ltr Boiler	EZYTAP 8Ltr Boiler	EZYTAP 8Ltr Boiler	-		
Undersink Chiller	-	UC800M Chiller	-	UC800M Chiller	UC800M Chiller		
Dispensing Height	18.5cm (EZYTAP75) 24cm (EZYTAP75T)	18.5cm (EZYTAP7800) 24cm (EZYTAP7800T)	18.5cm (EZYTAP85) 24cm (EZYTAP85T)	18.5cm (EZYTAP8800) 24cm (EZYTAP8800T)	24cm		
Dimensions H x W x D (mm)	Boiler: 324 x 220 x 350	Boiler: 324 x 220 x 350 Chiller: 260 x 290 x 400	Boiler: 410 x 234 x 306	Boiler: 410 x 234 x 306 Chiller: 260 x 290 x 400	Chiller: 260 x 290 x 400		
Description	The EZYTAP 75/75T dispenses hot & ambient water. The EZYTAP 75T is taller and has a 24cm dispensing height making it ideal for bottle filling. The EZYTRAY2 and EZYTRAY3 are not part of the EZYTAP and can be purchased separately.	The EZYTAP7800/7800T dispenses 14ltr/hour of 90C+ water with an instant draw off of 3.5 litres. It also dispenses copious amounts of ambient (un-chilled) water. The EZYTAP7800 has a dispensing height of 18.5cm. The dispensing height of the EZYTAP7800T is 24cm – ideal for filling sports bottles. The EZYTRAY2 and EZYTRAY3 drip trays are not part of the EZYTAP and can be purchased separately.	The EZYTAP85/85T dispenses 28ltr/ hour of 90C+ water with an instant draw off of 7 litres. It also dispenses copious amounts of ambient (un- chilled) water. The EZYTAP85 has a dispensing height of of 18.5cm. The dispensing height of the EZYTAP85T is 24cm – ideal for filling sports bottles. The EZYTRAY2 and EZYTRAY3 drip trays are not part of the EZYTAP and can be purchased separately.	The EZYTAP8800/8800T dispenses 28ltr/hour of 90C+water with an instant draw off of 7 litres. It also dispenses copious amounts of ambient (un-chilled) water. The EZYTAP8800 has a dispensing height of 18.5cm. The dispensing height of the EYTAP8800T is 24cm – ideal for filling sports bottles. The EZYTRAY2 and EZYTRAY3 drip trays are not part of the EZYTAP and can be purchased separately.	The EZYTAP AC800 dispenses 11.5ltr/hour of 6 – 10C water, plus copious amounts of ambient (un-chilled) water. The AC800 Tap features an upmarket Tap design to meet high end markets. The EZYTAP AC800 has a dispensing height of 24cm – ideal for filling sports bottles. The EZYTRAY2 and EZYTRAY3 drip trays are not part of the EZYTAP and can be purchased separately.		
EZYTAP Drip Trays	There are two compatible drip trays for our EZYTAP range, the EZYTRAY2 & the EZYTRAY3. Both EZYTRAYs are not part of the EZYTAPs and can be	tray. The E	RAY2 is a circular stainless steel drip EZYTRAY2 comes complete with a grill lation template.	drip tray.	tAY3 is a rectangular stainless steel The EZYTRAY3 comes complete with a istallation template.		

not part of the EZYTAPs and can be purchased separately.



EZYTRAY 2



Our Premium Selection for You

We stock a large number of main line Cosmetal products available for next day dispatch. Our selection includes coolers, taps, undersink chillers and accessories.











Type Of Water Dispensed



= Ambient Water




= Chilled Water



= Sparkling Water





= Hot Water











Code	Description	Dispensing Height	Hourly Output	Instant Draw Off		⊗		\bigcirc	Requires Gas & Regulator	Dimensions (mm) HxWxD	
CEPROIN55HCWG	Pro Stream tap with undersink boiler & chiller	23cm	15 Ltrs/h Chilled & Sparkling 55 Ltrs/h Hot	3 Ltrs Chilled & Sparkling 5 Ltrs Hot	-	v	v	·	REGCO2	Pro Stream: 255 x 131 x 212 Boiler: 407 x 242 x 315 H2OMY: 407 x 260 x 300	
CEDRTWGEC + CENIN120C8WG	Drink Tower tap with Niagara IN WG undersink chiller	33.5cm	120 Ltrs/h Chilled & Sparkling + Unlimited Ambient	70 Ltrs Chilled & Sparkling + Unlimited Ambient	•	v	v	-	REGCO2		
CEDRTWGEC + CEJIN45WG	Drink Tower tap with J Class IN WG undersink chiller	33.5cm	45 Ltrs/h Chilled & Sparkling + Unlimited Ambient	9 Ltrs Chilled & Sparkling + Unlimited Ambient	~	v	v	-	REGCO2	Drink Tower: 570 x 176 x 270 Niagara WG: 500 x 350 x 480 J Class WG: 400 x 255 x 400	
CEDRTWGEC + CEH2IN15WG	Drink Tower tap with H20MY IN WG undersink chiller	33.5cm	15 Ltrs/h Chilled & Sparkling + Unlimited Ambient	5 Ltrs Chilled & Sparkling + Unlimited Ambient	•	v	v	-	REGCO2	H2OMY WG: 407 x 260 x 300	
CETAPG400 + CENIN120C8WG	G400 tap with Niagara IN (WG) undersink chiller	23.5cm	120 Ltrs/h Chilled & Sparkling + Unlimited Ambient	70 Ltrs Chilled & Sparkling + Unlimited Ambient	v	v	v	-	REGCO2	Niagara (WG): 500 x 350 x 480	
CETAPG400 + CEJIN45WG	G400 tap with J Class IN (WG) undersink chiller	23.5cm	45 Ltrs/h Chilled & Sparkling + Unlimited Ambient	9 Ltrs Chilled & Sparkling + Unlimited Ambient	~	v	v	-	REGCO2	J Class (WG): 400 x 255 x 400	
CETAPG400 + CEH2IN15WG	G400 tap with H20MY IN (WG) undersink chiller	23.5cm	15 Ltrs/h Chilled & Sparkling + Unlimited Ambient	5 Ltrs Chilled & Sparkling + Unlimited Ambient	v	v	v	-	REGCO2	H2OMY (WG): 407 x 260 x 300	
CETAPCOB + CENIN120C8WG	Cobra 2 tap with Niagara IN (WG) undersink chiller	27.5cm	120 Ltrs/h Chilled & Sparkling or 120 Ltrs/h Chilled + Ambient	70 Ltrs Chilled & Sparkling or 70 Ltrs Chilled + Ambient	v	v	v	-	REGCO2	Niagara (WG): 500 x 350 x 480	
CETAPCOB + CEJIN45WG	Cobra 2 tap with J Class IN (WG) undersink chiller	27.5cm	45 Ltrs/h Chilled & Sparkling or 45 Ltrs/h Chilled + Ambient	9 Ltrs Chilled & Sparkling or 9 Ltrs Chilled + Ambient	•	v	v	-	REGCO2	J Class (WG): 400 x 255 x 400	
CETAPCOB + CEH2IN15WG	Cobra 2 tap with H20MY IN (WG) undersink chiller	27.5cm	15 Ltrs/h Chilled & Sparkling or 15 Ltrs/h Chilled + Ambient	5 Ltrs Chilled & Sparkling or 5 Ltrs chilled + Ambient	•	v	v	-	REGCO2	H2OMY (WG): 407 x 260 x 300	
CETAPG72 + CENIN120C8WG	G72 tap with Niagara IN (WG) undersink chiller	30cm	120 Ltrs/h Chilled & Sparkling or 120 Ltrs/h Chilled + Ambient	70 Ltrs Chilled & Sparkling or 70 Ltrs Chilled + Ambient	v	•	•	-	REGCO2	Niagara (WG): 500 x 350 x 480	
CETAPG72 + CEJIN45WG	G72 tap with J Class IN (WG) undersink chiller	30cm	45 Ltrs/h Chilled & Sparkling or 45 Ltrs/h Chilled + Ambient	9 Ltrs Chilled & Sparkling or 9 Ltrs Chilled + Ambient	•	v	v	-	REGCO2	J Class (WG): 400 x 255 x 400	
CETAPG72 + CEH2IN15WG	G72 tap with H20MY IN (WG) undersink chiller	30cm	15 Ltrs/h Chilled & Sparkling or 15 Ltrs/h Chilled + Ambient	5 Ltrs Chilled & Sparkling or 5 Ltrs chilled + Ambient	v	v	v	-	REGCO2	H2OMY (WG): 407 x 260 x 300	







NIAGARA FS 120

NIAGARA TOP 120

NIAGARA IN 120

HI CLASS TOP 30

AQUALITY

H2OMY IN

J CLASS IN















Type Of Water Dispensed



= Ambient Water



= Chilled Water



= Sparkling Water



= Contactless Dispensing



= Electronic Control

									_					
						Product Code Key	y:							
	FS = Floor Standing	TT = Table Top IN = Undersink	IB = Ice E	Bank (POU)	B= Bottled	AC = Ambien	t & Cold	WG	= With	Gas	C6 = St	ainless Steel	C8 = Skinplate	EC = Electronic Control
	Code	Description	(FS/ TT/ IN)	Hourly (Ltrs)	Instant Draw Off (Ltrs)	Ice Bank (POU) /Bottled			&		EC	Requires Gas & Regulator	Weight (KG)	Dimensions (mm) HxWxD
	CEN120C8	Niagara 120 IB AC C8	FS	120	70	IB	•	•	-	v *	-	-	51	1480 x 480 x 405
NIAGARA FS 120	CEN120C8WG	Niagara 120 IB AC WG C8	FS	120	70	IB	v	v	~	√ *	-	Regulator Included	59	1480 x 480 x 560
	CEN120C8WGEC	Niagara 120 IB AC WG C8 EC	FS	120	70	IB	•	v	•	v *	~	Regulator Included	59	1480 x 480 x 560
												ı		
NIAGARA TOP 120	CENTOP120C6	Niagara TOP 120 IB AC C6	TT	120	70	IB	~	~	-	-	-	-	54	510 x 482 x 490
WAGARA TOT 120	CENTOP120C6WGEC	Niagara TOP 120 IB AC WG C6 EC	TT	120	70	IB	•	•	•	-	v	Regulator Included	54	510 x 482 x 490
NIAGARA IN 120	CENIN120	NIAGARA IN 120 IB AC C8	IN	120	70	IB	•	~	-	-	-	-	46	500 x 350 x 480
NIAGARA IN 120	CENIN120C8WG	NIAGARA IN 120 IB AC WG C8	IN	120	70	IB	•	•	•	-	-	Regulator Included	46	500 x 350 x 480
HI CLASS TOP 30	CEHITOP30	HI CLASS TOP 30 IB AC	TT	30	7	IB	•	~	-	v *	-	-	23	407 x 262 x 552
HI CLASS TOP 30	CEHITOP30WG	HI CLASS TOP 30 IB AC WG	TT	30	7	IB	v	v	-	v *	-	REGCO2	23	407 x 262 x 552
	CEAQ20P	AQUALITY POU IB AC 20 BLACK	FS	20	3	IB	v	v	-	-	-	-	20	1180 x 345 337
AQUALITY	CEAQ22BWG	AQUALITY BOTTLED AC WG FC16 BLACK	FS	22	5	В	~	v	v	-	-	REGCO2	20	1180 x 345 337
	CEAQ28PWG	AQUALITY POU IB AC WG 28 FC16 BLACK	FS	28	5	IB	•	•	•	-	-	REGCO2	20	1180 x 345 337
H2OMY IN 15	CEH2IN15	H2OMY IN 15 IB AC	IN	15	3	IB	~	~	-	-	-	-	15	407 x 260 x 235
	CEH2IN15WG	H2OMY IN 15 IB AC WG	IN	15	3	IB	•	•	•	-	-	REGCO2	19	407 x 260 x 300
LCLASS IN 45	CEJIN45	J CLASS IN 45 IB AC	IN	45	9	IB	v	v	-	-	-	-	21	400 x 255 x 400
J CLASS IN 45	CEJIN45WG	J CLASS IN 45 IB AC WG	IN	45	9	IB	~	v	~	-	-	REGCO2	21	400 x 255 x 400















Drip Tray VR-1

Drip Tray VR-12











Drip Tray VR-IS



Drip Tray VR-IS2

Taps: Mix & Match


			NIAGA	ARA IN	H20N	MY IN	J CLASS IN		
Code	Name	Description	Ambient & Chilled	Ambient & Chilled & CO ²	Ambient & Chilled	Ambient & Chilled & CO ²	Ambient & Chilled	Ambient & Chilled & CO ²	
CEDRTWGEC	DRINK TOWER V19 EC AC WG	Electronically Controlled Tap For Ambient & Chilled, Or Chilled & CO² Carbonated Water	~	•	•	~	•	•	
CETAPCOB	Cobra 2	A 2 Way Chrome-Plated Manual Tap	~	✓	~	~	✓	~	
CETAPG400	G400 AC WG	Electronic Tap For Ambient, Chilled & CO ² Carbonation	-	✓	-	~	-	~	
CETAPG72	G72 WG	Manual Two Way Tap For Chilled & CO ² Water	-	✓	-	~	-	~	
CETRAYVR1	Driptray VR-1	Recessed Stainless Steel	Drip Tray Without D	rainage - Dimensions	(mm) 28H x 405W x 2	25D			
CETRAYVR12	Driptray VR-12	Recessed Stainless Ste	el Drip Tray With Dra	inage - Dimensions (r	nm) 32H x 408W x 18	9D			
CETRAYVRG7	Driptray VR-G7	Stainless Steel Drip Tray	With Drainage For Pr	o Stream - Dimension	s (mm) 86H x 122W x	128D			
CETRAYVRIR	Driptray VR-IR	Stainless Steel Counter Top Drip Tray Without Drainage - Dimensions (mm)							
CETRAYVRIS	Driptray VR-IS	Counter Top Drip Tray Without Drainage - Dimensions (mm) 32H x 408W x 189D							
CETRAYVRIS2	Driptray VR-IS2	Counter Top Drip Tray With Drainage - Dimensions (mm)							

Installation Rail, Filter & Accessories (To connect COSMETAL Water Coolers & Undersink units to a mains water supply)



Code	Description					
PFRAILKITCOS	Installation Rail for NIAGARA 120 ltr Coolers With High Capacity Replacement Filter Candle & Re-usable Filter Housing. Includes Compression Fittings, Non-Return Valve, Water Block & Pressure Reducing Valve					
FILTBCM	High Capacity Replacement FIBREDYNE Filter Candle with 20,000 Litre Capacity for PFRAILKITCOS Installation Rail					
PFRAILKIT	Installation Rail for the HI CLASS TOP 30, AQUALITY, H20MY IN 15, J CLASS IN 45 With Replacement Carbon Block Filter Candle & Re-usable Filter Housing. Includes Compression Fittings, Non Return Valve, Water Block & Pressure Reducing Valve.					
FILTCAR	Carbon Block Replacement Filter Candle for PFRAILKIT Installation Rail.					
CEAQOVERFLOW	3 Litre Drip Tray Overflow Kit Connecting To The Drip Tray. With Audible Alarm When Full. Pre-Installed Into AQUALITY Coolers					
REGCO2	Regulator for CO2 600Gm disposable cylinder M11x1 thread, for WG - With Gas Products where mentioned.					

Our Journey

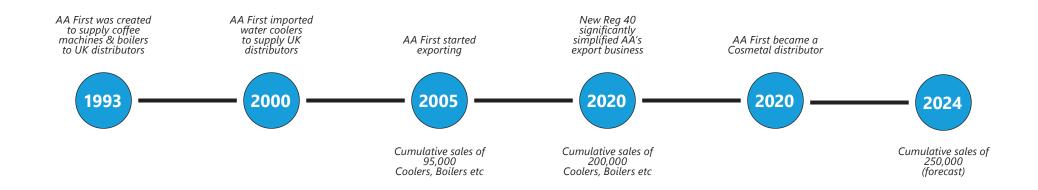



Quality – Reliability – Integrity

UK Head Office:

Cedar House
Grange Farm
Long Lane
Newbury
RG14 2TF
T: + 44 (0) 1635 202489
E: enquiries@aafirst.co.uk

European Correspondent:

T: + 33 (0) 674437445 T: + 33 (0) 640650708 E: Derek@aafirst.eu E: Lesley@aafirst.eu

